


RM4PM3000

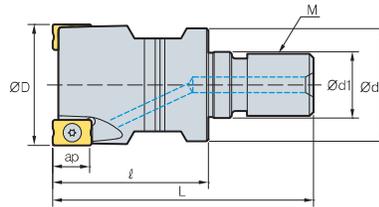

• AR: -6°
• RR: -39°~-16°

(mm)

Designation	ØD	Ød	Ød ₁	ℓ	L	M	ap	
RM4PM	3014HR-M06	14	12	6.5	25	40	M06	0.02
	3016HR-M08	16	14.5	8.5	25	42	M08	0.02
	3018HR-M08	18	14.5	8.5	25	42	M08	0.03
	3020HR-M10	20	18	10.5	30	51	M10	0.06
	3025HR-M12	25	23	12.5	35	59	M12	0.11
	3032HR-M16	32	29	17	40	67	M16	0.21
	3040HR-M16	40	29	17	40	67	M16	0.26
3050HR-M16	50	30	17	45	72	M16	0.41	

Available inserts

LNEX-MA LNM(E)X-MF LNM(E)X-MM



Designation	Cermet		Coated										Uncoated			page			
	CN2500	CN30	NC5330	NCM325	NCM335	NCM535	NCM545	PC2505	PC2010	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400		ST30A	G10	H01
LNEX	100605PNR-MF																		E11
	100605PNR-MM									●	●			●	●				
	100605PNR-MA																	●	
	100608PNR-MF									●	●			●	●				
	100608PNR-MM										●			●	●				
LNMX	100605PNR-MF													●	●				
	100605PNR-MM									●	●	●		●	●				
	100608PNR-MF										●			●	●				
	100608PNR-MM									●				●	●				

Available adaptor

Designation	Available adaptor
RM4PM 3014HR-M06	MAT-M06
3016HR-M08	MAT-M08
3018HR-M08	
3020HR-M10	
3025HR-M12	MAT-M12
3032HR-M16	MAT-M16
3040HR-M16	
3050HR-M16	

Designation : RM4PM3032HR-M16
Modular head threading measure size (M16)

||

Adaptor spec.: MAT-M16-035-S32S
Adaptor threading measure (M16)

Parts

Specification		
Ø14~Ø50	FTKA0307	TW09S

Available inserts E11 Available adaptor E401~E402