


Drilling - Drill Holder

X-Drill Holder (SYM05) (DC 14~16)

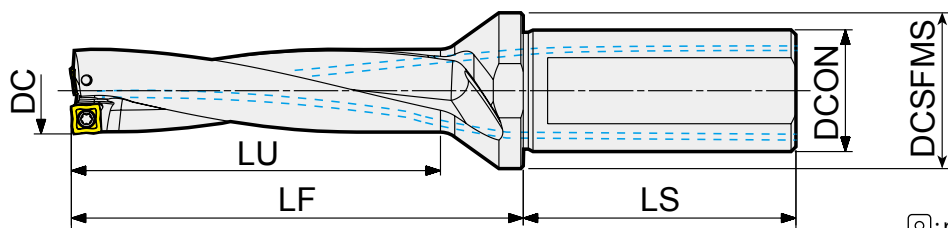


□ : p. 200

Unit: mm

Series	DC	LU	Designation	EDP 3700..	LF	OAL	DCON	DCSFMS	LS
NEW SYM050204	14	28	YGSY2 - 140S20 - 05	1019	46	96.0	20	25	50
		42	YGSY3 - 140S20 - 05	1031	60	110.0			
		56	YGSY4 - 140S20 - 05	1043	74	124.0			
		70	YGSY5 - 140S20 - 05	1055	88	138.0			
	15	30	YGSY2 - 150S20 - 05	1020	49	99.0			
		45	YGSY3 - 150S20 - 05	1032	64	114.0			
		60	YGSY4 - 150S20 - 05	1044	79	129.0			
		75	YGSY5 - 150S20 - 05	1056	94	144.0			
	16	32	YGSY2 - 160S25 - 05	1021	52	102.0			
		48	YGSY3 - 160S20 - 05	1033	68	118.0			
		64	YGSY4 - 160S20 - 05	1045	84	134.0			
		80	YGSY5 - 160S20 - 05	1057	100	150.0			

PLUG (DCON20)



Designation	EDP No.	DCON	ØD	M size	PT size	H
PLUG M12-1/8	38000001	20	14	M12x1.0	PT 1/8	6


* Plug for turning lathe should be ordered separately.

* Clamping Torque (Nm) 0.6Nm

SYM05	Screw	Wrench
Description	TP062004-GS	TPWFTP06
EDP	18000252	18000262

Plug	DCON	Ø 20	Ø 25	Ø 32
	Description	PLUG M12-1/8	PLUG M14-1/8	PLUG M22-1/4
	EDP	38000001	38000002	38000003

X-Drill Holder (SYM06) (DC 17~20)

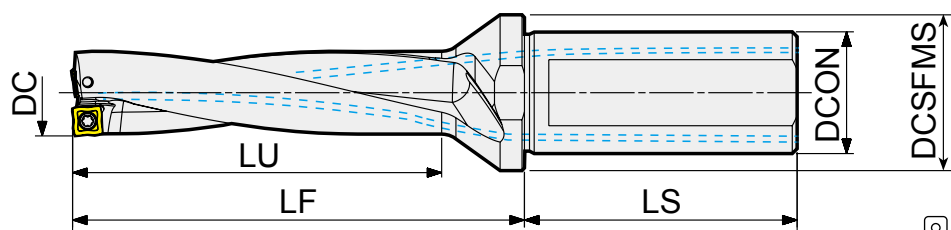


: p.200

Unit:mm

Series	DC	LU	Designation	EDP 3700..	LF	OAL	DCON	DCSFMS	LS
17	17	34	YGSY2 - 170S25 - 06	0851	54	110.0	25	32	56
		51	YGSY3 - 170S25 - 06	0855	71	127.0			
		68	YGSY4 - 170S25 - 06	0859	88	144.0			
		85	YGSY5 - 170S25 - 06	0863	105	161.0			
18	18	36	YGSY2 - 180S25 - 06	0852	57	113.0			
		54	YGSY3 - 180S25 - 06	0856	75	131.0			
		72	YGSY4 - 180S25 - 06	0860	93	149.0			
		90	YGSY5 - 180S25 - 06	0864	111	167.0			
19	19	38	YGSY2 - 190S25 - 06	0853	59	115.0			
		57	YGSY3 - 190S25 - 06	0857	78	134.0			
		76	YGSY4 - 190S25 - 06	0861	97	153.0			
		95	YGSY5 - 190S25 - 06	0865	116	172.0			
20	20	40	YGSY2 - 200S25 - 06	0854	63	119.0			
		60	YGSY3 - 200S25 - 06	0858	83	139.0			
		80	YGSY4 - 200S25 - 06	0862	103	159.0			
		100	YGSY5 - 200S25 - 06	0866	123	179.0			

NEW
SYM06
060204

PLUG (DCON25)



Designation	EDP No.	DCON	ØD	M size	PT size	H
PLUG M14-1/8	38000002	25	16	M14x1.0	PT 1/8	6

* Plug for turning lathe should be ordered separately.

* Clamping Torque (Nm) 0.7Nm


SYM06	Screw	Wrench
Description	TP072205-GS	TPWFTP07
EDP	18000253	18000001

Plug	DCON	Ø 20	Ø 25	Ø 32
Description	PLUG M12-1/8	PLUG M14-1/8	PLUG M22-1/4	
EDP	38000001	38000002	38000003	

Drilling - Drill Holder

X-Drill Holder (SYM07) (DC 21~23)


NEW

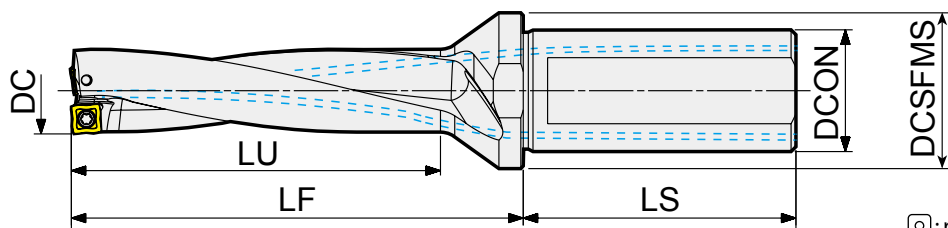

p. 200

Unit: mm

Series	DC	LU	Designation	EDP 3700..	LF	OAL	DCON	DCSFMS	LS
NEW SYM07T206	21	42	YGSY2 - 210S25 - 07	1022	65	121.0	25	32	56
		63	YGSY3 - 210S25 - 07	1034	86	142.0			
		84	YGSY4 - 210S25 - 07	1046	107	163.0			
		105	YGSY5 - 210S25 - 07	1058	128	184.0			
	22	44	YGSY2 - 220S25 - 07	1023	67	123.0			
		66	YGSY3 - 220S25 - 07	1035	89	145.0			
		88	YGSY4 - 220S25 - 07	1047	111	167.0			
		110	YGSY5 - 220S25 - 07	1059	133	189.0			
	23	46	YGSY2 - 230S25 - 07	1024	68	124.0			
		69	YGSY3 - 230S25 - 07	1036	91	147.0			
		92	YGSY4 - 230S25 - 07	1048	114	170.0			
		115	YGSY5 - 230S25 - 07	1060	137	193.0			

PLUG (DCON25)

Designation	EDP No.	DCON	ØD	M size	PT size	H
PLUG M14-1/8	38000002	25	16	M14x1.0	PT 1/8	6

* Plug for turning lathe should be ordered separately.


* Clamping Torque (Nm) 0.7Nm

SYM07	Screw	Wrench
Description	TP072205-GS	TPWFTP07
EDP	18000253	18000001

Plug	DCON	Ø 20	Ø 25	Ø 32
	Description	PLUG M12-1/8	PLUG M14-1/8	PLUG M22-1/4
	EDP	38000001	38000002	38000003

Drilling - Drill Holder

X-Drill Holder (SYMX08) (DC 24~28)

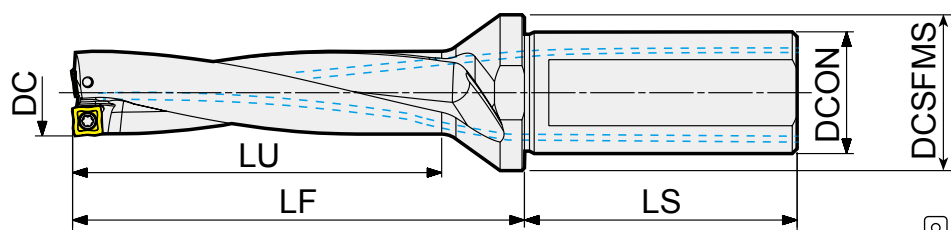


□: p.200

Unit:mm

Series	DC	LU	Designation	EDP 3700..	LF	OAL	DCON	DCSFMS	LS
NEW SYMX 080306	24	48	YGSY2 - 240S32 - 08	1025	70	130.0	32	45	60
		72	YGSY3 - 240S32 - 08	1037	94	154.0			
		96	YGSY4 - 240S32 - 08	1049	118	178.0			
		120	YGSY5 - 240S32 - 08	1061	142	202.0			
	25	50	YGSY2 - 250S32 - 08	1026	72	132.0			
		75	YGSY3 - 250S32 - 08	1038	97	157.0			
		100	YGSY4 - 250S32 - 08	1050	122	182.0			
		125	YGSY5 - 250S32 - 08	1062	147	207.0			
	26	52	YGSY2 - 260S32 - 08	1027	73	133.0			
		78	YGSY3 - 260S32 - 08	1039	99	159.0			
		104	YGSY4 - 260S32 - 08	1051	125	185.0			
		130	YGSY5 - 260S32 - 08	1063	151	211.0			
	27	54	YGSY2 - 270S32 - 08	1028	77	137.0			
		81	YGSY3 - 270S32 - 08	1040	104	164.0			
		108	YGSY4 - 270S32 - 08	1052	131	191.0			
		135	YGSY5 - 270S32 - 08	1064	158	218.0			
28	56	YGSY2 - 280S32 - 08	1029	79	139.0				
	84	YGSY3 - 280S32 - 08	1041	107	167.0				
	112	YGSY4 - 280S32 - 08	1053	135	195.0				
	140	YGSY5 - 280S32 - 08	1065	163	223.0				

NEW
SYM X
080306

PLUG (DCON32)



Designation	EDP No.	DCON	ØD	M size	PT size	H
PLUG M22-1/4	38000003	32	24	M22x1.25	PT 1/4	10

* Plug for turning lathe should be ordered separately.

* Clamping Torque (Nm) 1.2Nm

SYM X08	Screw	Wrench
Description	TP072506-GS	TPWFTP07
EDP	18000261	18000001

Plug	DCON	Ø 20	Ø 25	Ø 32
Description	PLUG M12-1/8	PLUG M14-1/8	PLUG M22-1/4	
EDP	38000001	38000002	38000003	