


PAXM5000

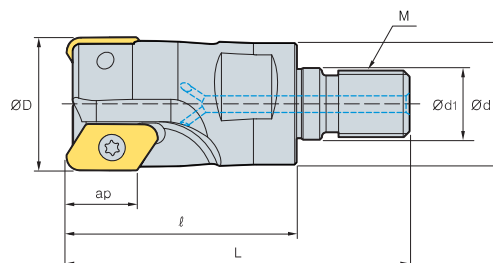

AA
90°
• AR: 6°~8°
• RR: -7°~5°

(mm)

Designation		ØD	Ød	Ød1	l	L	M	ap	
PAXM 5025HR-A,B-M12	2	25	23	12.5	55	79	M12	17	0.12
5032HR-A,B-M16	2	32	29	17.0	55	82	M16	17	0.2
5040HR-A,B-M16	3	40	29	17.0	55	82	M16	17	0.4

• A type: Insert NoseR 0.4~3.2, B type: Insert NoseR 4.0~5.0

Available inserts

XEKT-MA XEKT-ML



Designation	Cement										page
	CN2500	CN30	NC5330	NCM535	NCM545	PC2505	PC2510	PC3700	PC3710	PC3730	
XEKT 19M504FR-MA											E31
19M508FR-MA											
19M512FR-MA											
19M516FR-MA											
19M518FR-MA											
19M520FR-MA											
19M530FR-MA											
19M532FR-MA											
19M540FR-MA											
19M550FR-MA											
Designation	Cement										page
	CN2500	CN30	NC5330	NCM535	NCM545	PC2505	PC2510	PC3700	PC3710	PC3730	
XEKT 19M504ER-ML											E31
19M508ER-ML											
19M512ER-ML											
19M516ER-ML											
19M518ER-ML											
19M520ER-ML											
19M530ER-ML											
19M532ER-ML											
19M540ER-ML											
19M550ER-ML											

Available adaptor

Designation	Available adaptor
PAXM 5025HR-A,B-M12	MAT-M12
5032HR-A,B-M16	
5040HR-A,B-M16	MAT-M16

Designation: PAXM5025HR-M12
Modular head threading measure size (M12)

II

Adaptor spec.: MAT-M12-030-S25S
Adaptor threading measure (M12)

Parts

Specification	Screw	Wrench
Ø25~Ø40	PTKA0408	TW15S

Available inserts E31 Available adaptors E401~E402



E Milling